




FOCUS90

Lumină spot


Standard



Opțiuni

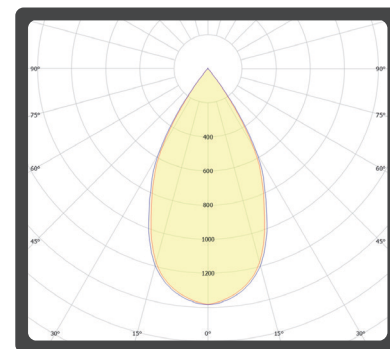

	L	H	D
FOCUS90	230	235	90

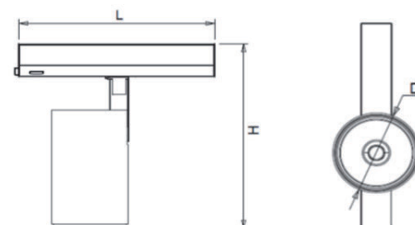

TIP	CRI	CCT	COB	EPREL ID	Clasă de eficiență energetică	Flux (lm)	Putere totală (W)	Eficiență lm/W	UGR <19	Ta	Greutate kg	buc. /pachet	buc. /palet
FOCUS 90 2500/830 20°	80	3000	1	850918	D	2500	24.0	104	-	-10°C / +35°C	1.00	1	180
FOCUS 90 2500/840 20°	80	4000	1	850911	D	2700	24.0	113	-	-10°C / +35°C	1.00	1	180
FOCUS 90 3500/830 20°	80	3000	1	850918	D	3400	34.0	100	-	-10°C / +35°C	1.00	1	180
FOCUS 90 3500/840 20°	80	4000	1	850911	D	3600	34.0	106	-	-10°C / +35°C	1.00	1	180
FOCUS 90 2500/830 30°	80	3000	1	850918	D	2700	24.0	113	-	-10°C / +35°C	1.00	1	180
FOCUS 90 2500/840 30°	80	4000	1	850911	D	2800	24.0	117	-	-10°C / +35°C	1.00	1	180
FOCUS 90 3500/830 30°	80	3000	1	850918	D	3600	34.0	106	-	-10°C / +35°C	1.00	1	180
FOCUS 90 3500/840 30°	80	4000	1	850911	D	3800	34.0	112	-	-10°C / +35°C	1.00	1	180
FOCUS 90 2500/830 40°	80	3000	1	850918	D	2500	24.0	104	-	-10°C / +35°C	1.00	1	180
FOCUS 90 2500/840 40°	80	4000	1	850911	D	2600	24.0	108	-	-10°C / +35°C	1.00	1	180
FOCUS 90 3500/830 40°	80	3000	1	850918	D	3400	34.0	100	-	-10°C / +35°C	1.00	1	180
FOCUS 90 3500/840 40°	80	4000	1	850911	D	3500	34.0	103	-	-10°C / +35°C	1.00	1	180
FOCUS 90 2500/830 60°	80	3000	1	850918	D	2500	24.0	104	-	-10°C / +35°C	1.00	1	180
FOCUS 90 2500/840 60°	80	4000	1	850911	D	2600	24.0	108	-	-10°C / +35°C	1.00	1	180
FOCUS 90 3500/830 60°	80	3000	1	850918	D	3300	34.0	97	-	-10°C / +35°C	1.00	1	180
FOCUS 90 3500/840 60°	80	4000	1	850911	D	3500	34.0	103	-	-10°C / +35°C	1.00	1	180