




MILAN

Corp liniar de iluminat

Standard



Opțiuni

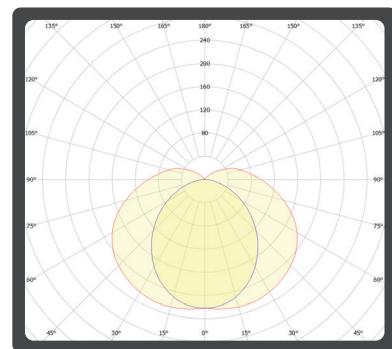

	L	W	H
MILAN L600	592	49	68
MILAN L1200	1167	49	68
MILAN L1500	1452	49	68



TIP	optic	CRI	CCT	module LED	EPREL ID	Clasă de eficiență energetică	Flux (lm)	Putere totală (W)	Eficacitate lm/W	UGR	Ta	Greutate kg	buc. /pachet	buc. /palet
MILAN L600 2200/840	PC	80	4000	1	1037746	D	2200	15.6	141	>20	-20°C / +40°C	1.3	2	200
MILAN L1200 4400/840	PC	80	4000	2	1037746	D	4400	31.0	142	>20	-20°C / +35°C	1.9	2	100
MILAN L1500 6600/840	PC	80	4000	3	1037728	D	6600	46.0	143	>20	-20°C / +40°C	2.2	2	100