






NAPOLI P

Montaj aparent



Standard



Opțiuni

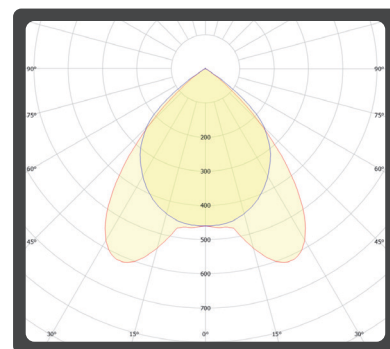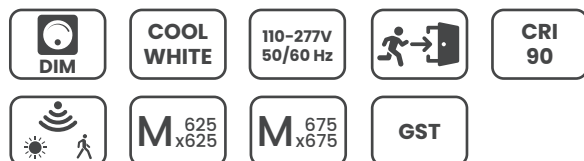

	L	W	H
NAPOLI.P LED M600X600	604	604	58
NAPOLI.P LED M1200X300	1204	304	58
NAPOLI.P LED M1500X300	1504	304	58



TIP	optic	CRI	CCT	module LED	EPREL ID	Clasă de eficiență energetică	Flux (lm)	Putere tot. (W)	Eficacitate lm/W	UGR	Ta	Greutate kg	buc /pachet	buc /palet
NAPOLI.P LED M600X600 2 3880/830 DPB	DPB	80	3000	2	1037730	D	3880	31.5	123	<19	+10°C / +40°C	4.7	1	50
NAPOLI.P LED M600X600 2 4070/840 DPB	DPB	80	4000	2	1037746	D	4070	31.5	129	<19	+10°C / +40°C	4.7	1	50
NAPOLI.P LED M600X600 3 3010/830 DPB	DPB	80	3000	3	1037729	D	3010	23.0	131	<19	+10°C / +40°C	4.7	1	60
NAPOLI.P LED M600X600 3 3160/840 DPB	DPB	80	4000	3	1037745	D	3160	23.0	137	<19	+10°C / +40°C	4.7	1	60
NAPOLI.P LED M600X600 4 4200/830 DPB	DPB	80	3000	4	1037729	D	4200	31.7	132	<19	+10°C / +40°C	4.7	1	60
NAPOLI.P LED M600X600 4 4400/840 DPB	DPB	80	4000	4	1037745	D	4400	31.7	139	<19	+10°C / +40°C	4.7	1	60
NAPOLI.P LED M1200X300 2 4080/830 DPB	DPB	80	3000	4	1037730	D	4080	30.0	136	<19	+10°C / +40°C	4.7	1	50
NAPOLI.P LED M1200X300 2 4290/840 DPB	DPB	80	4000	4	1037746	D	4290	30.0	143	<19	+10°C / +40°C	4.7	1	50
NAPOLI.P LED M1500X300 2 6740/830 DPB	DPB	80	3000	6	1037731	D	6740	50.0	135	<19	+10°C / +40°C	5.5	1	50
NAPOLI.P LED M1500X300 2 7070/840 DPB	DPB	80	4000	6	1037728	D	7070	50.0	141	<19	+10°C / +40°C	5.5	1	50