





# RAPSODY

Panouri încastrate

## Standard

LED
IP40
IK06
220-240V  
50/60 Hz
CRI 80

CL II
650°
CE
RoHS  
COMPLIANT

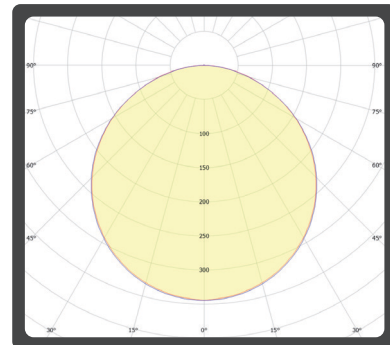

	L	W	H
RAPSODY M6X3	596	296	13.5
RAPSODY M6X6	596	596	13.5
RAPSODY M12X3	1196	296	13.5
RAPSODY M15X3	1496	296	13.5

## Opțiuni


DIM
COOL WHITE
CRI 90
110-277V  
50/60 Hz
RoHS
IP54
IP65

M<sub>625</sub>x<sub>625</sub>
M<sub>675</sub>x<sub>675</sub>
GR
BK
GST

## Accesorii



Rapsody 1500

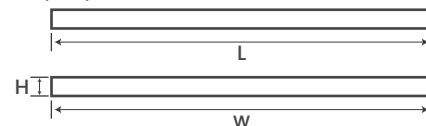

TIP	optic	CRI	CCT	module LED	EPREL ID	Clasă de eficiență energetică	Flux (lm)	Putere totală (W)	Eficacitate lm/W	UGR	Ta	Greutate kg	buc. /pachet	buc. /palet
RAPSODY M6x3 1800/840	MP	80	4000	1	849064	D	1800	16	113	<19	+10°C / +40°C	2.5	1	100
RAPSODY M6x3 1700/830	MP	80	3000	1	849082	D	1700	16	106	<19	+10°C / +40°C	2.5	1	100
RAPSODY M6x3 1800/840	OP	80	4000	1	849064	D	1800	16	113	>20	+10°C / +40°C	2.5	1	100
RAPSODY M6x3 1700/830	OP	80	3000	1	849082	D	1700	16	106	>20	+10°C / +40°C	2.5	1	100
RAPSODY M6x6 3620/840	MP	80	4000	2	849064	D	3620	30	122	<19	+10°C / +40°C	4.1	1	50
RAPSODY M6x6 3440/830	MP	80	3000	2	849082	D	3440	30	116	<19	+10°C / +40°C	4.1	1	50
RAPSODY M6x6 3500/840	OP	80	4000	2	849064	D	3500	30	118	>20	+10°C / +40°C	4.1	1	50
RAPSODY M6x6 3350/830	OP	80	3000	2	849082	D	3350	30	113	>20	+10°C / +40°C	4.1	1	50
RAPSODY M6x6 3860/840	MP	80	4000	2	849064	D	3860	32.3	120	<19	+10°C / +40°C	4.1	1	50
RAPSODY M6x6 3700/830	MP	80	3000	2	849082	D	3700	32.3	115	<19	+10°C / +40°C	4.1	1	50
RAPSODY M6x6 3900/840	OP	80	4000	2	849064	D	3900	32.3	121	>20	+10°C / +40°C	4.1	1	50
RAPSODY M6x6 3700/830	OP	80	3000	2	849082	D	3700	32.3	115	>20	+10°C / +40°C	4.1	1	50
RAPSODY M6x6 5220/840	MP	80	4000	2	849064	D	5220	46.0	113	>20	+10°C / +40°C	4.1	1	50
RAPSODY M6x6 5000/830	MP	80	3000	2	849082	D	5000	46.0	109	>20	+10°C / +40°C	4.1	1	50
RAPSODY M6x6 5200/840	OP	80	4000	2	849064	D	5200	46.0	113	>20	+10°C / +40°C	4.1	1	50
RAPSODY M6x6 5000/830	OP	80	3000	2	849082	D	5000	46.0	109	>20	+10°C / +40°C	4.1	1	50
RAPSODY M12X3 3400/840	MP	80	4000	1	849062	C	3400	30.0	113	<19	+10°C / +40°C	4.5	1	50
RAPSODY M12X3 3200/830	MP	80	3000	1	849105	D	3200	30.0	107	<19	+10°C / +40°C	4.5	1	50
RAPSODY M12X3 3400/840	OP	80	4000	1	849062	C	3400	30.0	113	>20	+10°C / +40°C	4.5	1	50
RAPSODY M12X3 3200/830	OP	80	3000	1	849105	D	3200	30.0	107	>20	+10°C / +40°C	4.5	1	50
RAPSODY M12X3 3800/840	MP	80	4000	1	849062	C	3800	33.0	115	<19	+10°C / +40°C	4.5	1	50
RAPSODY M12X3 3600/830	MP	80	3000	1	849105	D	3600	33.0	109	<19	+10°C / +40°C	4.5	1	50
RAPSODY M12X3 3800/840	OP	80	4000	1	849062	C	3800	33.0	115	>20	+10°C / +40°C	4.5	1	50
RAPSODY M12X3 3600/830	OP	80	3000	1	849105	D	3600	33.0	109	>20	+10°C / +40°C	4.5	1	50
RAPSODY M12X3 5200/840	MP	80	4000	1	849062	C	5200	47.0	111	>20	+10°C / +40°C	4.5	1	50
RAPSODY M12X3 5000/830	MP	80	3000	1	849105	D	5000	47.0	106	>20	+10°C / +40°C	4.5	1	50
RAPSODY M12X3 5200/840	OP	80	4000	1	849062	C	5200	47.0	111	>20	+10°C / +40°C	4.5	1	50
RAPSODY M12X3 5000/830	OP	80	3000	1	849105	D	5000	47.0	106	>20	+10°C / +40°C	4.5	1	50
RAPSODY M15X3 6000/840	MP	80	4000	1	1391650	C	6000	53.0	113	<19	+10°C / +40°C	6.0	1	50